




# rental applications



Thanks to its flexibility and strength, the GENSYS 2.0 is perfectly suitable for a container or a rental application.

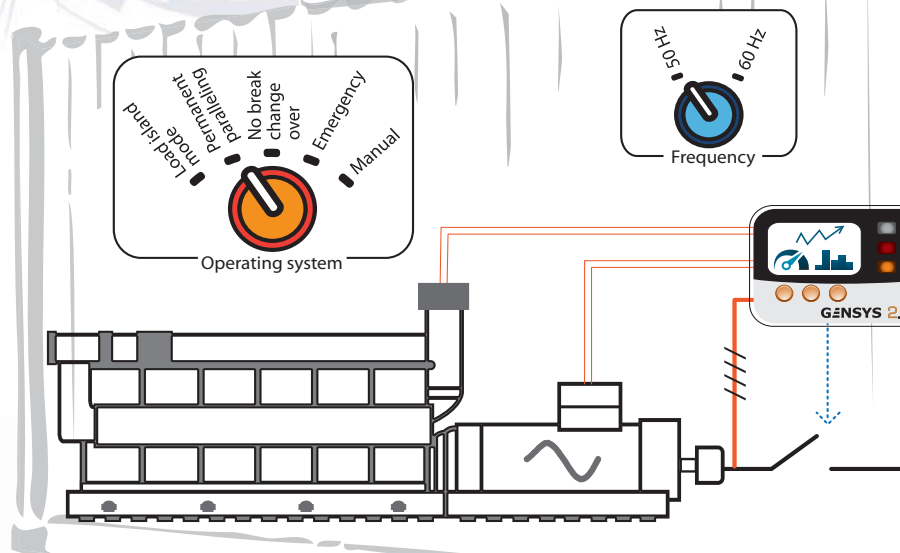

# AVANTAGES OF THE GENSYS 2.0

The GENSYS 2.0 has a I/O high capacity expansion, with the ability to manage input / output relay as a dial indicator or door contacts.

The product's potential in terms of integrated programming can meet 100% of generator applications. It will control, either on 60Hz parallel to mains or on 50Hz in AMF. The user switches the operational mode by a simple switching key.

The GENSYS 2.0 allows a 3 phases, biphases or a single phase configuration.

The screen in large size characters, the synoptic front panel interface and the comprehensive manual give the users a maximum safety and simplicity.

The IP65 front panel, the communication isolated ports, the tropicalization and the backlight temperature compensated option are an asset for extreme environment applications.

The GENSYS 2.0 also offers an optional «PowerTank» connection with a Capacitor to avoid starting failures.




## APPLICATIONS

Mains load operation



Island mode



Permanent paralleling

