




EW345

Standby power : 345KVA/276KW
Prime power : 312,5KVA/250KW

Standard features

- Engine : CUMMINS , MTAA11-G3
- Charge alternator : 24V
- Governor : Electrical
- Generator : STAMFORD , HC444ES
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- Industrial muffler
- User's manual

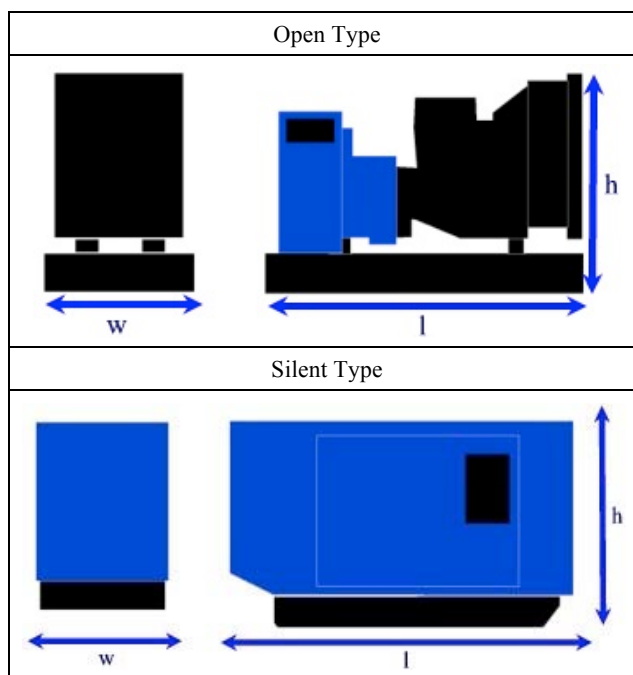

Weight and Dimensions

GEN-Set	Dimension (Largo×Ancho×Alto)	Peso
Open Type	3000mm×1100mm×1900mm	2868 Kg
Silent Type	4366mm×1406mm×2404mm	3993 Kg

Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	498	345/276	315.5/250

Engine Data

Manufacturer/Model	CUMMINS MTAA11-G3 4-cycle
Cylinder /Arrangement	6 / L
Displacement	10.8 L
Bore and Stroke	125 mm×147 mm
Compression ratio	15 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	310KW
Frequency regulation , steady state	≤ 1%
Governor : type	Electrical

Exhaust System

Exhaust gas flow	950 L/S
Exhaust temperature	440°C
Max back pressure	10.0Kpa



Fuel System

Fuel consumption 100% (of the Prime Power)	188 g/kw.h
--	------------

Oil system

Total oil capacity w/filters	39.0 L
------------------------------	--------

Air intake

Engine air flow	395 L/s
-----------------	---------

Coolant System

Radiator & engine capacity	61.0 L
Max water temperature	104°C
Thermostat	82-94°C

Generator Data

Manufacturer / Type	STAMFORD HCI444ES
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	Brushless SHUNT
Insulation : class , temperature rise	H / H
protection	IP23

Control panel



Specifications :

Frequency meter , Ammeter , Voltmeter , Alarms and faults
Oil pressure , water temperature , No start-up , Overspeed ,
Min/max battery voltage , Low fuel level , Emergency stop

Engine parameters:

Hours counter , Oil pressure , water temperature